

# KwikDraw-A 20HR-12






## Features

Key features:-

- 1U 20" LCD console drawer
- Ultra high resolution 1600 x 1200
- 104-key keyboard with touchpad
- Enhanced aesthetics with moulded front handle and two point lock
- 12-port DVI-D, USB & Audio KVM

## Dimensions

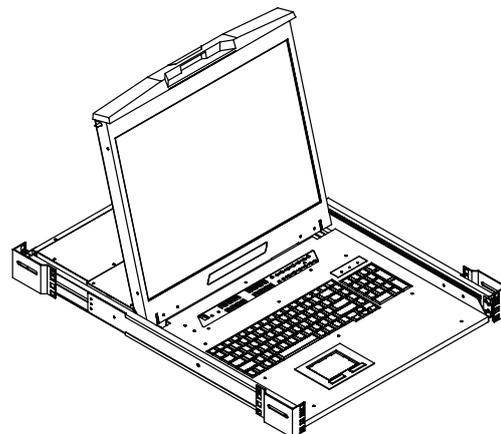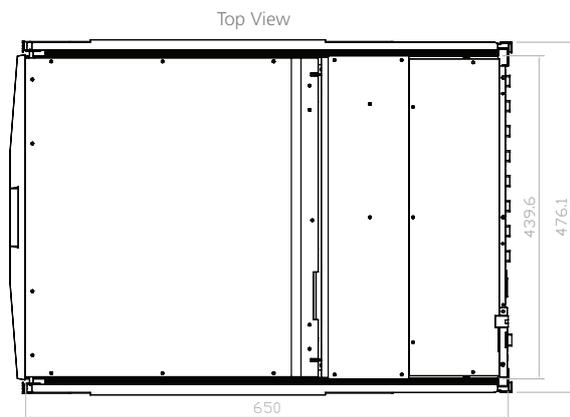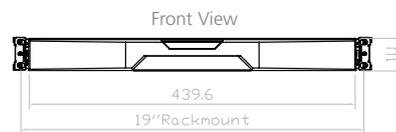

Unit : mm

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: [www.amplicon.com](http://www.amplicon.com) Email: [sales@amplicon.com](mailto:sales@amplicon.com)

# KwikDraw-A 20HR-12

## Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

### Console


LCD Panel	Size (diagonal): 20.4" TFT Max resolution: 1600 x 1200 Brightness (cd/m <sup>2</sup> ): 300 Backlight: CCFL Colours: 16.7 M Contrast ratio (typ): 800 : 1 Viewing angle (H/V): 178° x 178° Active area (mm): 408 x 306 MTBF (hrs): 45,000 Signal input: VGA	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Casing Colour	Black (RAL 9005)	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 48 Watt, Standby 5 Watt
Weight	Net: 15.5kgs (34.1lbs) Gross: 23.4kgs (51.5lbs)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 5-90%, non-condensing Shock: 10G acceleration (11ms duration) Vibration: 5-500Hz 1G RMS random vibration
Dimensions (W x D x H)	Product: 439.6 x 650 x 44 mm (17.3 x 25.6 x 1.73 in) Packing: 595 x 860 x 140 mm (23.4 x 33.9 x 5.5 in)		

### KVM

KVM Port	Number of ports: 12 Connector: DVI-D connector, USB 3.0 connector (combined for keyboard, mouse & audio) Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet	Regulatory	Safety: FCC & CE certified Environmental: RoHS2 & REACH compliant
Local Console	Graphic connector: 1 x DVI-D Input device: 2 x USB type A for keyboard & mouse Audio out: 1 x 3.5mm stereo audio	Power	Input: Auto-sensing 100 to 240VAC, 50 / 60Hz Consumption: Max. 12 Watt, Standby 5 Watt
Casing Colour	Black (RAL 9005)	Environmental	Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58-100Hz / 0.98G (11ms / cycle)
Weight	Net: 2.5kgs (5.5lbs) Gross: 5.4kgs (11.9lbs)	Management	PC selection: Front button & hotkey
Dimensions (W x D x H)	Product: 443 x 171 x 44 mm (17.4 x 6.7 x 1.73 in) Packing: 500 x 400 x 90 mm (19.7 x 15.7 x 3.5 in)	Compatibility	Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix

## Rear ports

### KVM Port Connection

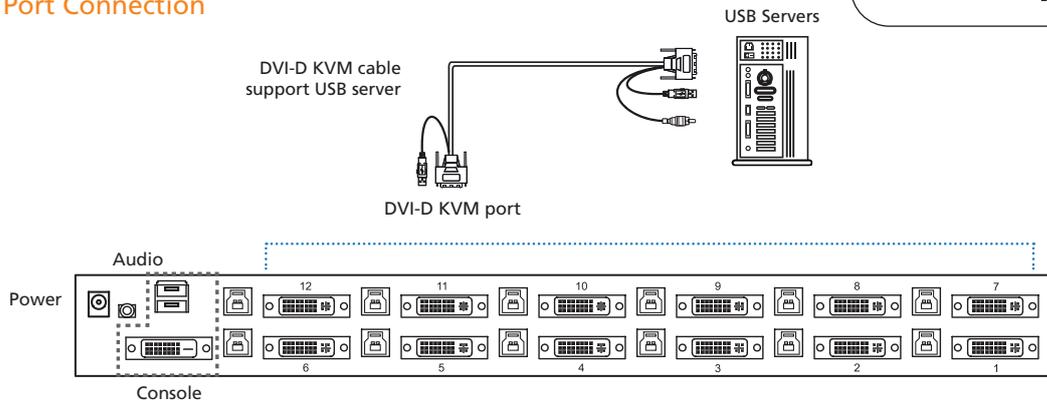

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: [www.amplicon.com](http://www.amplicon.com) Email: [sales@amplicon.com](mailto:sales@amplicon.com)