

# KwikDraw-A 171-8/16






## Features

Key features:-

- 1U 17" LCD console drawer
- 104-key keyboard with touchpad or trackball
- New enhanced aesthetics with moulded front handle
- 2 post rack mounting available
- 8 or 16 port KVM
- Hot pluggable, no software or drivers required
- Easy & quick installation

## Dimensions

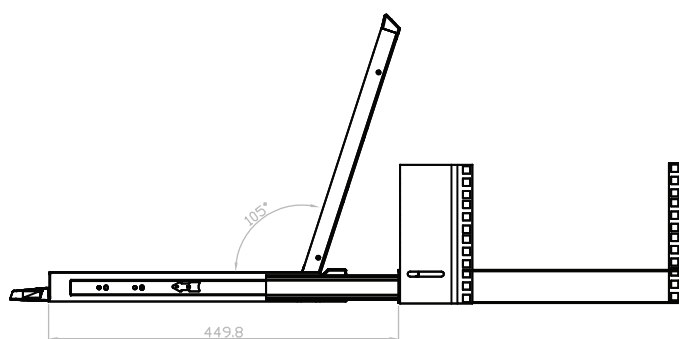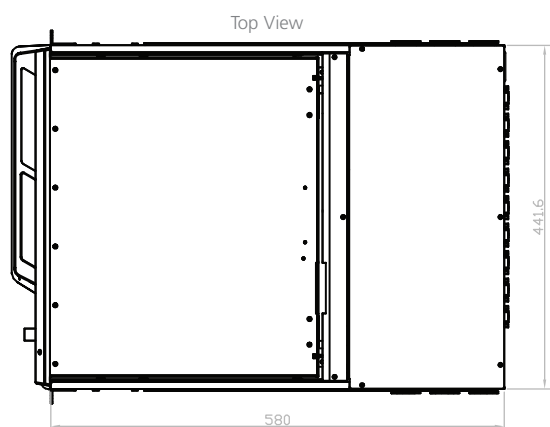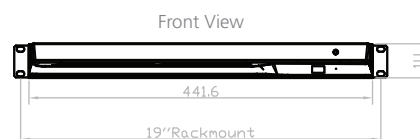

Unit : mm

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: [www.amplicon.com](http://www.amplicon.com) Email: [sales@amplicon.com](mailto:sales@amplicon.com)

# KwikDraw-A 171-8/16

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

## Specifications

### Console


|                        |                                                                                                                                                                                                                                                                                       |               |                                                                                                                                                                                  |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LCD Panel              | Size (diagonal): 19" TFT<br>Max resolution: 1280 x 1024<br>Brightness (cd/m <sup>2</sup> ): 250<br>Backlight: CCFL<br>Colours: 16.7 M<br>Contrast ratio (typ): 1000 : 1<br>Viewing angle (H/V): 160° x 160°<br>Active area (mm): 338 x 270<br>MTBF (hrs): 50,000<br>Signal input: VGA | Regulatory    | Safety: cUL, FCC & CE certified<br>Environmental: RoHS2 & REACH compliant                                                                                                        |
| Casing Colour          | Black (RAL 9005)                                                                                                                                                                                                                                                                      | Power         | Input: Auto-sensing 100 to 240VAC, 50 / 60Hz<br>Consumption: Max. 48 Watt, Standby 5 Watt                                                                                        |
| Weight                 | Net: 13kgs (28.6lbs)<br>Gross: 19kgs (41.8lbs)                                                                                                                                                                                                                                        | Environmental | Operating: 0 to 55°C<br>Storage: -5 to 60°C<br>Relative humidity: 5~90%, non-condensing<br>Shock: 10G acceleration (11ms duration)<br>Vibration: 5~500Hz 1G RMS random vibration |
| Dimensions (W x D x H) | Product: 441.6 x 580 x 44 mm (17.4 x 22.8 x 1.73 in)<br>Packing: 590 x 808 x 140 mm (23.2 x 31.8 x 5.5 in)                                                                                                                                                                            |               |                                                                                                                                                                                  |

### KVM


|                        |                                                                                                                                      |               |                                                                                                                                                                                                                                                                                                           |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| KVM Port               | Number of ports: 8 or 16<br>Connector: DB-15 combo connector<br>Connectivity: Combo 4-in-1 KVM cable, up to 6, 10 & 15 feet          | Power         | Input: Auto-sensing 100 to 240VAC, 50 / 60Hz<br>Option DC: 12V / 24V / 48V / 110 ~ 125V DC input<br>Consumption: Max. 24 Watt, Standby 5 Watt                                                                                                                                                             |
| Local Console          | Graphic connector: 1 x DB-15 VGA<br>Resolution: Up to 1920 x 1080 / 1920 x 1200<br>Input device: 2 x USB type A for keyboard & mouse | Environmental | Operating: 0 to 50°C<br>Storage: -5 to 60°C<br>Relative humidity: 90%, non-condensing<br>Shock: 50G peak acceleration (11ms, half-sine wave)<br>Vibration: 58~100Hz / 0.98G (11ms / cycle)                                                                                                                |
| Weight                 | Net: 8 port - 2.4kgs (5.3lbs), 16 port - 2.6kgs (5.7lbs)<br>Gross: 8 port - 3.9kgs (8.6lbs), 16 port - 4.2kgs (9.2lbs)               | Management    | Multilingual OSD: English, France, German, Spanish, Italian, Russian, Simplified Chinese, Japanese<br>Hotkey combination: Scroll-lock, Cap-lock, Num-lock, Alt, Ctrl & Win<br>Security: Password enable & disable, up to 8 users profile for port access<br>PC Selection: Front button, OSD menu & hotkey |
| Dimensions (W x D x H) | Product: 443 x 171 x 44 mm (17.4 x 6.7 x 1.73 in)<br>Packing: 500 x 400 x 90 mm (19.7 x 15.7 x 3.5 in)                               |               |                                                                                                                                                                                                                                                                                                           |
| Expansion              | Up to 128 servers by 8-level cascade                                                                                                 |               |                                                                                                                                                                                                                                                                                                           |
| Regulatory             | Safety: cUL, FCC & CE certified<br>Environmental: RoHS2 & REACH compliant                                                            |               |                                                                                                                                                                                                                                                                                                           |

## Rear ports

### 8 Port



### 16 Port



Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: [www.amplicon.com](http://www.amplicon.com) Email: [sales@amplicon.com](mailto:sales@amplicon.com)